

<b>AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT</b>				1. CONTRACT ID CODE <b>J</b>		PAGE OF PAGES <b>1   11</b>	
2. AMENDMENT/MODIFICATION NO. <b>0004</b>		3. EFFECTIVE DATE <b>04-Mar-2007</b>		4. REQUISITION/PURCHASE REQ. NO.		5. PROJECT NO.(If applicable)	
6. ISSUED BY AFGHANISTAN ENGINEER DISTRICT US ARMY CORPS OF ENGINEERS KABUL APO AE 09356		CODE <b>W917PM</b>		7. ADMINISTERED BY (If other than item 6)  <b>See Item 6</b>		CODE	
8. NAME AND ADDRESS OF CONTRACTOR (No., Street, County, State and Zip Code)				X		9A. AMENDMENT OF SOLICITATION NO. <b>W917PM-07-R-0003</b>	
				X		9B. DATED (SEE ITEM 11) <b>23-Feb-2007</b>	
						10A. MOD. OF CONTRACT/ORDER NO.	
						10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					
<b>11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS</b>							
<input checked="" type="checkbox"/> The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offer <input type="checkbox"/> is extended, <input checked="" type="checkbox"/> is not extended. Offer must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended by one of the following methods: (a) By completing Items 8 and 15, and returning <u>1</u> copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.							
12. ACCOUNTING AND APPROPRIATION DATA (If required)							
<b>13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS.</b> <b>IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.</b>							
A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.							
B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(B).							
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:							
D. OTHER (Specify type of modification and authority)							
E. IMPORTANT: Contractor <input type="checkbox"/> is not, <input type="checkbox"/> is required to sign this document and return _____ copies to the issuing office.							
14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)  Questions and Government Answers are provided.  Aerial map is provided.							
Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.							
15A. NAME AND TITLE OF SIGNER (Type or print)				16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)			
				TEL: _____ EMAIL: _____			
15B. CONTRACTOR/OFFEROR		15C. DATE SIGNED		16B. UNITED STATES OF AMERICA		16C. DATE SIGNED	
_____ (Signature of person authorized to sign)				BY _____ (Signature of Contracting Officer)		<b>04-Mar-2007</b>	

SECTION SF 30 - BLOCK 14 CONTINUATION PAGE

The following have been added by full text:

Questions and Answers Amendment 0004

Q.1 AS PER AMENDMENT 001, IN TABLE 1.1 INDICATES THAT  
1.2 COE HOUSING AND OFFICE SUPPORT 2.1 SITE SURVEY MASTER PLANNING DURATIONS  
INDICATED AS 60 DAYS AFTER AWARD.  
BUT ON THE OTHER HAND 2.2 SITE CLEARING / UXO / DEMINING DURATION IS 150 DAYS. IS THIS  
MEANS THAT BEFORE THE UXO CLEARING COMPLETED WE SHALL BE WORKING ON SITE.  
PLEASE CONFIRM.

A.1 Site clearing UXO/DEMINING shall have to be completed in phases to accommodate the early completion  
dates of COE Housing, fencing, surveying etc.

Q.2 AS PER AMENDMENT 002, REVISED BID SCHEDULE 00010  
PLEASE CONFIRM THAT NON-DESIGN COSTS SHALL BE CALCULATED IN  
0001AB SITE SURVEY / MASTER PLANNING.

A. – Response is under development for distribution in subsequent amendment.

Q.3 AS PER AMENDMENT 002, REVISED BID SCHEDULE 00010  
THE ROAD NETWORK HAS BEEN IDENTIFIED IN 0005AF IN BASE BID ITEMS WHEREAS THERE IS  
ANOTHER ROAD NETWORK ITEM IN OPTIONAL ITEMS IN 007AP. PLEASE GIVE INFORMATION ON  
WHAT SHALL BE IN BASE BID AND OPTIONAL BID ITEM OF ROAD NETWORKS.  
( PLEASE CONFIRM THAT MAIN SITE ROADS SHALL BE IN 005AF  
AND THE ROADS TO RANGES AND ASP SHALL BE IN 007AP)

A.3 Road Network 0007AP Includes the following There is a Base Road System inside the fenced compound, A  
road to the ASP 1500 meters from the compound, A Road to the Burn Pit and a Road to the Ranges (Note: The Road  
to the ASP, Road to the Burn Pit and Road to the Ranges can be the same Road).

Road from Bridge to Brigade Main Gate 0007BB Includes the following In the Addendum there is a Road from the  
Base out to the Main Road across the Dam (approximately 4.6 Km long).

Q.4 IN AMENDMENT 001, SECTION 01010, 2.5.1 INDICATES THAT GUARD HOUSES SHALL BE  
LOCATED AT EACH OPENING ON PERIMETER ( ONE AT MAIN GATE AND ONE AT REAR GATE )  
AND ON EVERY CORNER.  
PLEASE CONFIRM THAT THE GUARD TOWERS SHALL BE LOCATED AT EACH CORNER AND  
MAXIMUM INTERVALS OF 400 MT.

A.4 Jalalabad Brigade shall have the following, 1 Reception Building and Guard House at Main Gate, 1 Guard  
house at Second Gate, 1 Guard Tower at each corner, and other Guard Towers as required along perimeter  
fence/wall at 400 meter intervals maximum. At ASP provide one guard house, one guard tower that allows for  
complete visibility of terrain in all four directions.

Q.5 HOW FAR SHALL BE THE LANDFILL / BURN SITE OF WASTE MANAGEMENT FROM SITE OR HOW FAR FROM THE ROAD TO RANGES / ASP. OR IN OTHER WORDS SHALL WE CONSIDER AN ADDITIONAL ROAD TO LANDFILL / BURN SITE OF WASTE MANAGEMENT.

A.5 ASP, and Landfill/Burn Site shall be off the road to the ranges.

Q.6 R20 VALUE HAS BEEN CLEARLY IDENTIFIED ON ALL HABITABLE BUILDINGS. BUT ON THE OTHER HAND SOME OF THE BUILDINGS SHALL BE PRE-ENGINEERED BUILDINGS WITH CMU WALL CONSTRUCTION UP TO 3 MT HEIGHT. PLEASE CONFIRM THAT THOSE PRE-ENGINEERED TYPE OF BUILDINGS (INHABITABLE) SHALL HAVE LESSER R VALUE (EXCEPT OFFICES).

A.6 All buildings not required to having heating or cooling systems may have uninsulated CMU walls, unless 3-D panel system is used.

Q.7 THERE IS A DISCREPANCY BETWEEN AMENDMENT 001 AND AMENDMENT 002 AS FOR THE DESCRIPTION OF BASE BID ITEMS AND OPTIONAL ITEMS. PLEASE CONFIRM THAT THE AMENDMENT 002, BID SCHEDULE 00010 GOVERNS.

A.7 Use the Section 00010 Proposal Schedule that is furnished in Amendment 0003.

Q.8 IN AMENDMENT 001, SECTION 01010, 2.5.2 GUARD HOUSES, SHALL HAVE 13 MM THICK LAMINATED GLASS IN SLIDING HEAVY DUTY ALUMINUM FRAMES, ON THE OTHER HAND THE DOORS SHALL BE BULLET PROOF. IT SEEMS THERE IS A DISCREPANCY WHICH OF THIS TO BE APPLIED, BULLET PROOF WINDOWS AND DOORS AND HEAVY DUTY DOORS AND WINDOWS.

A.8 Contractor shall provide items stated in RFP 13 mm laminated glazing, heavy duty frames. And bullet resistant doors.

Q.9 IN OPTIONAL BATTALION COMPLEXES, THERE ARE MANY OFFICERS INDICATED WHOM BILLET AT BOQ BUILDINGS. FOR DETERMINING THE TOILET AND SHOWER FACILITIES THOSE (WHO BILLETED AT BOQS) SHALL BE CONSIDERED OR NOT.

A.9 The Officers Quarters shall have built in toilets, see 2. 9 BACHELOR OFFICERS QUARTERS for numbers and ratios.

Q.10 PLEASE PROVIDE US A SAMPLE LAYOUT OF ASP, FOR DETERMINING THE AREA USE PLAN FOR FENCING AND DEMINING PURPOSES.

A.10 Construct ASP 65 meters from road and install fence perimeter 45 meters from from ASP.

Q.11 ON APPENDIX B, THERE IS A MAP SHOWING THE LOCATIONS OF RANGES, WITH A PINK LINE IDENTIFYING RANGE BOUNDARY PLEASE GIVE INFORMATION ON THE BOUNDARY SHALL BE FENCED OR NOT.

SITE CLEARING / UCO / DEMINING SHALL BE DONE FOR THIS BOUNDARY OR NOT? ( THE APPROXIMATE AREA IS 22.5 KM BY 37.5 KM )

A.11 Plan on clearing the area of each Range, the area between ranges, the area 100 meters to the rear of ranges, all roads, all building sites to below the foundation depth. Mark all areas abutting range with fence consisting of metal posts, 2 strands of barbwire and demining signs.

Q.12 IN SECTION 01015, 3.9.2 SPECIFIES THAT STANDING SEAM ROOFING WITH 60 MM HIGH SEAMS. SHALL GOVERNMENT BE ENTERTAIN 51 MM HIGH SEAMS, OR SHALL GOVERNMENT ENTERTAIN TRAPEZOIDAL STEEL SHEET COVERING WITH SUB DETAILS AS USED IN OTHER ANA BRIGADES ALL AROUND AFGHANISTAN.

A.12 Contractors shall provide what is required in RFP.

Q.13 REFERENCE SECTION 00800, PAGE 47, FAR 52.211-12 LIQUIDATED DAMAGES AND SECTION 00555.4 PROJECT SCHEDULE; IT STATES THE AMOUNT FOR DAMAGES TO BE \$6,854.16 PER CALENDAR DAY. IT IS UNDERSTOOD THAT THIS APPLIES ONLY TO THE OVERALL CONTRACT COMPLETION AT 450 DAYS. PLEASE CONFIRM.

A.13 Confirmed.

Q.14 REFERENCE SECTION 00800, PAGE 46, ATTACKS FROM HOSTILE ENTITIES; THE PARAGRAPH IN PART STATES THAT "COSTS INCURRED IN THE PERFORMANCE OF PROJECT EXECUTION THAT ARISE FROM THE ATTACKS OF HOSTILE ENTITIES, SUCH AS COSTS ARISING FROM DAMAGE TO OR DESTRUCTION OF CONTRACTOR EQUIPMENT AND FACILITIES, AND DAMAGE TO OR DESTRUCTION OF THE PROJECT PRIOR TO GOVERNMENT ACCEPTANCE, ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR." IT IS REQUESTED THAT A WAR RISKS CLAUSE BE INCLUDED AND SUBSTITUTED FOR THIS SECTION. SEE WAR RISK CLAUSE EXTRACTED FROM ANOTHER GOVERNMENT CONTRACT ON LAST TWO PAGES OF THIS DOCUMENT.

A.14 No change will be made.

Q.15 REFERENCE SECTION 00010, CLIN 0001AA DESIGN COSTS; IT APPEARS THE INTENT IS TO INCLUDE ALL DESIGN COSTS UNDER CLIN 0001AA. HOWEVER, IT IS NOT CLEAR IF AED DESIRES TO INCLUDE THE COST FOR DESIGN FOR BOTH THE BASELINE CLINS AND THE OPTIONAL CLINS UNDER CLIN 0001AA. THE CURRENT DOCUMENT DOES NOT PROVIDE FOR ANY OTHER LOCATION FOR THE DESIGN FOR THE OPTIONAL ITEMS. PLEASE CLARIFY IF THIS CLIN IS INTENDED TO INCLUDE THE COSTS FOR THE BASELINE AND OPTIONAL CLINS.

A.15 All Design Cost for base and options are to be completed as a package and reviewed during the 35%, 65%, 99%, and 100% reviews prior to award of options. This will speed up the construction time of completing options.

Q.16 REFERENCE AMENDMENT 0002, SECTION 00010, PAGE 5 WHICH DEFINES BOTH DESIGN COSTS AND NON-DESIGN COSTS. IT APPEARS CLEAR THAT AED WOULD LIKE TO SEPARATE THE DESIGN COSTS FROM THE NON-DESIGN COSTS. PLEASE CLARIFY THE INTENT OF THIS. SHOULD THE DESIGN COSTS BE INCLUDED UNDER CLIN 0001AA AND ANY NON-DESIGN COSTS BE INCLUDED UNDER THE OTHER RESPECTIVE CLINS? PLEASE CLARIFY.

A.16 – Response is under development for distribution in subsequent amendment.

Q.17 REFERENCE AMENDMENT 0002, SECTION 00010, PAGE 5, PARAGRAPH 6, COST LIMITATION. IT APPEARS THAT THIS LIMITATION IS ON CLIN 0001A ONLY. THIS LIMITATION DOES NOT INCLUDE CLIN 0001AB WHICH INCLUDES SITE TOPOGRAPHIC SURVEY WHICH IS DEFINED AS A NON-DESIGN COST.

A.17 – Response is under development for distribution in subsequent amendment.

Q.18 REFERENCE SECTION 00010, CLIN 0001AB SITE SURVEY/MASTER PLANNING; IT IS NOT CLEAR IF AED DESIRES TO INCLUDE THE COST FOR DESIGN FOR BOTH THE BASELINE CLINS AND THE OPTIONAL CLINS UNDER CLIN 0001AB. THE CURRENT DOCUMENT DOES NOT PROVIDE FOR ANY OTHER LOCATION FOR THE SITE SURVEY/MASTER PLANNING COSTS FOR THE OPTIONAL ITEMS.

PLEASE CLARIFY IF THIS CLIN IS INTENDED TO INCLUDE THE COSTS FOR THE BASELINE AND OPTIONAL CLINS.

A.18 – Response is under development for distribution in subsequent amendment.

Q.19 REFERENCE AMENDMENT 0001, PARAGRAPH 2.6.1 (PAGE 8 OF 22) INDICATES THAT THE DFAC IS TO INCLUDE PROPANE STORAGE. DRAWING A-1 (PAGE 273 OF 343) SHOWS A DFAC WITH WOOD BURNING STOVES. WILL THE DFAC REQUIRE A REDESIGN TO USE DIFFERENT TYPE OF STOVES? PLEASE CLARIFY THE INTENT.

A.19 All Stoves and Afghan Tea boilers shall be propane. There are no wood burning stoves in project.

Q.20 REFERENCE AMENDMENT 0001, PARAGRAPH 2.8 (PAGE 8 OF 22) INDICATES THERE ARE 3 “A” TYPE BARRACKS IN THE BRIGADE AND GARRISON COMPLEX. PAGE 282 AND 283 OF 343 REQUIRE 4 “A” TYPE BARRACKS. PLEASE CLARIFY.

A.20 Paragraph 2.8 is correct there are 3 A Type Barracks, along with the other building listed.

Q.21 REFERENCE AMENDMENT 0001, PARAGRAPH 2.3 WATER SYSTEM; REQUIRES “THE DEVELOPMENT OF A GROUND WELL WATER SOURCE; WATER WELL PUMPS AND SERVICE BOOSTER PUMPS”. PLEASE PROVIDE INFORMATION ON THE DEPTH OF THE WELLS AND NUMBER OF WELLS REQUIRED.

A.21 All data will have to be gathered by the successful Contractor, then produce a well or wells to meet RFP requirements.

Q.22 REFERENCE AMENDMENT 0001, PARAGRAPH 2.1 (PAGE 5 OF 22); PLEASE PROVIDE ANY INFORMATION AVAILABLE ON THE PREVAILING WIND DIRECTION.

A.22 All data will have to be gathered by the successful Contractor.

Q.23 REFERENCE PAGE 102 OF 343 PARAGRAPH 6.2.1; PLEASE PROVIDE A COPY OF CONCEPT DRAWING “ANA HEAT-COOL DESIGN-02” DATED 10 DEC 06.

A.23 Will provide drawing in this ammendment, Note this drawing is a guide only.

Q.24 REFERENCE PAGE 107 OF 343 PARAGRAPH 6.4.1.4.3; PLEASE PROVIDE A COPY OF AED DRAWING “CO-GEN-DIESEL-02A”.

A.24 – Response is under development for distribution in subsequent amendment.

Q.25 REFERENCE PARAGRAPH 4.1.2 (PAGE 16 OF 22); THE FIRST PARAGRAPH STATES THAT CO-GEN WASTE HEAT SHALL BE USED TO SUPPLY HOT WATER FOR BUILDING HEAT AND FOR DOMESTIC HOT WATER FOR TOILET/SHOWER BUILDINGS, DFAC, LAUNDRY AND MAINTENANCE BUILDINGS. THE SECOND PARAGRAPH CALLS FOR HEAT RECOVERY OF WASTE HEAT FOR HEATING THE TOILET/SHOWER BUILDINGS, DFAC, LAUNDRY, TRAINING AND MAINTENANCE FACILITIES. PLEASE CLARIFY:

- A. IS THE INTENT TO INCLUDE THE TRAINING BUILDING IN THE CO-GEN SYSTEM? PLEASE CLARIFY.
- B. BOTH PARAGRAPHS REQUIRE A LAUNDRY BUILDING TO BE INCLUDED IN THE SCOPE OF THE CO-GEN WASTE HEAT SYSTEM. HOWEVER, THERE IS NO LAUNDRY BUILDING

REQUIRED IN EITHER A BASELINE ITEM OR OPTION. IF A LAUNDRY BUILDING IS TO BE INCLUDED, PLEASE PROVIDE INFORMATION ON HEATING LOADS FOR THIS BUILDING.

A.25 – Response is under development for distribution in subsequent amendment.

Q.26 REFERENCE PARAGRAPH 4.1.2 (PAGE 16 OF 22); PARAGRAPH 1 STATES “SYSTEMS SHALL BE AUGMENTED BY BOILER FOR CONSTANT HOT WATER SUPPLY AS REQUIRED.” PLEASE CLARIFY. IS THIS INTENDED TO PROPOSE THAT WE PROVIDE A BACK-UP BOILER AT THE PRIME POWER PLANT TO AUGMENT PROCESS WATER HEATING DURING PERIODS OF LOW POWER PRODUCTION?

A.26 – Response is under development for distribution in subsequent amendment.

Q.27 REFERENCE PARAGRAPH 2.20.1 (PAGE 10 OF 22); IS IT INTENDED TO HAVE SEPARATE ON-SITE POWER GENERATION AT THE ASP OR SHOULD POWER BE BROUGHT FROM THE MAIN BASE POWER PLANT?

A.27 The ASP should be powered from the base Generators with an underground line.

Q.28 REFERENCE AMENDMENT 0001, PARAGRAPH 4.1.2 (PAGE 16 OF 22) STATES; THE BUILDING DESIGN FOR THE JALALABAD BRIGADE SHALL PROVIDE CO-GENERATION CO-GEN USING WASTE HEAT FROM THE GENERATORS EXHAUST AND RADIATOR TO MAKE PROCESS HOT-WATER FOR BUILDING HEAT AND DOMESTIC HOT WATER (WATER-TO WATER HEAT-EXCHANGER) FOR ALL TOILET/SHOWER BUILDINGS, DFACS, LAUNDRY, AND FOR THE MAINTENANCE FACILITIES.” PAGE 293 OF 343 PROVIDES A FLOOR PLAN OF THE POWER PLANT WHICH DOES NOT INCLUDE PROVISION FOR ANY CO-GEN EQUIPMENT. FURTHER SECTION 00010 PROPOSAL SCHEDULE INCLUDES “CLIN 0007AM COGENERATION WATER HEATING SYSTEM”. FROM THIS WE CONCLUDE THAT THE BASELINE DESIGN FOR ALL FACILITIES, INCLUDING THE POWER PLANT, IS TO EXCLUDE THE CO-GEN SYSTEM. CLIN 0007AM, IF EXERCISED, IS TO INCLUDE THE COST OF THE CO-GEN SYSTEM AND THE RE-DESIGN OF ALL FACILITIES TO BE SUPPORTED BY THIS SYSTEM. COULD AED PLEASE CLARIFY IT’S OVERALL INTENT FOR THIS WORK.

A.28 – Response is under development for distribution in subsequent amendment.

Q.29 REFERENCE PAGE 23/343, PART 1 – GENERAL, 1. DESIGN/BUILD (DB) PROCESS: PLEASE DEFINE WHICH ARCHITECTS AND/OR ENGINEERS ON THE TEAM SHALL BE REGISTERED AND WHAT LICENSING JURISDICTIONS ARE ALLOWABLE? IS THE LICENSING RESTRICTED TO US REGISTRATIONS ONLY?

A.29 Project lead in each Disipline Architectural, Structural, Mechanical, Civil, shall be licenced. Licence shall be from a country that requires a university degree, experiance, and has a state exam system.

Q.30 EREFERENCE PAGE 23/343, PART 1 – GENERAL, 1. DESIGN/BUILD (DB) PROCESS: PLEASE CLARIFY WHETHER THE A/E FIRM MUST HAVE SPECIFIC ERRORS AND OMISSIONS INSURANCE AND WHAT LIMITS ARE REQUIRED.

A.30 No errors and omissions insurance is called for.

Q.31 IS THIS PROCUREMENT RESTRICTED TO US PRIME CONTRACTORS ONLY?

A.31 No.

Q.32 REFERENCE SECTION 00110-A, PAGE 16: THERE APPEARS TO BE A REFERENCE TO A VOLUME II THAT IS NOT ADDRESSED IN THE DETAILED INSTRUCTIONS. THE FIRST PARAGRAPH STATES "THE PROPOSAL SUBMITTAL SHALL INCLUDE ONE ORIGINAL AND FIVE COPIES OF THE VOLUME I AND VOLUME II AND ONE ORIGINAL AND TWO COPIES OF THE VOLUME II PROPOSAL. ALSO, SF 1442 – NO. 13 STATES AN ORIGINAL AND 4 COPIES.

A.32 Be guided by SF 1442 Block 13A which calls for sealed offers in original and 4 copies. Original and one copy of Volume II (Price) proposal is acceptable.

Q.33 OUR UNDERSTANDING OF THE DETAILED INSTRUCTIONS IS THAT THE NUMBER OF COPIES REQUIRED IS AS FOLLOWS: (PLEASE CONFIRM.)

VOLUME I – MANAGEMENT-TECHNICAL PROPOSAL ---1 ORIGINAL AND 5 COPIES  
VOLUME II – COST/PRICE PROPOSAL ----1 ORIGINAL AND 2 COPIES.

A.33 See A.32, above

Q.34 REFERENCE SECTION 00110-A, FACTOR 3 – PROJECT MANAGEMENT: INSTRUCTIONS INCLUDE THE SENTENCE "LIMIT DISCUSSION TO NO MORE THAN TWO PAGES." THIS DOES NOT APPEAR TO BE ADEQUATE SPACE TO ADDRESS ALL THE ITEMS REQUESTED FOR THIS SECTION, INCLUDING AN ORGANIZATION CHART. PLEASE CONSIDER AN INCREASE TO 5 PAGES FOR THIS FACTOR.

A.34 No.

Q.35 REFERENCE SECTION 00110-A; 1.2 FORMAT: INSTRUCTIONS SPECIFY 8-1/2" X 11" SHEETS. PLEASE ADVISE IF A LIMITED NUMBER OF 11"X17" INCH FOLDED SHEETS COULD BE USED FOR SUCH ITEMS AS THE PROJECT LIST AND/OR A PROJECT SCHEDULE, WHICH WOULD BE COUNTED AS TWO PAGES EACH.

A.35 Per 1.2 Format, we are looking for no more than 50 single-sided or 25 double-sided pages, printed on 8-1/2" x 11" or A4 sheets in Volume 1. The idea of using 11"X17" sheets for clarity and counting as two sheets is a great idea.

Q.36 DOES THE "SIGNED COVER LETTER REQUIRED" IN VOLUME 2 - 2.1 REFER TO THE SF 1442, OR SHOULD THE SF 1442 BE INCLUDED IN A SEPARATE TAB SECTION?

A.36 A signed cover letter is to be submitted. The acknowledged SF 1442, amendments, and completed Section 00600 Representations and Certifications are to be included in the Volume II (Price) proposal.

Q.37 IN AMENDMENT # 2 IT IS STATED THAT THE ESTIMATED LENGTH OF THE ACCESS ROAD IS 4.6 KM. IF THE ACTUAL ROAD IS LONGER OR SHORTER WILL THERE BE A CHANGE ORDER TO REFLECT THE INCREASE OR DECREASE IN COST.

A.37 No. The information came from several GPS position shots. All survey data will have to be gathered by the Contractor, then produce a correct Map of the road for final design to meet RFP requirements.

Q.38 SHOULD THE REPRESENTATIONS AND CERTIFICATIONS BE INCLUDED WITH THE PROPOSAL SCHEDULE OR IN A SEPARATE TAB SECTION?

A.38 Please see A.36, above.

Q.39 PLEASE PROVIDE ANY AVAILABLE TOPOGRAPHIC SURVEYS, GEOTECHNICAL INFORMATION AND SECURITY REPORTS FOR THE JALALABAD LOCATION.

A.39 – Response is under development for distribution in subsequent amendment.

Q.40 REFERENCE PROPOSAL SCHEDULE NOTES NUMBER 7. EXERCISE OF OPTIONAL BID ITEMS: “OPTIONAL BID ITEMS MAY, AT THE OPTION OF THE GOVERNMENT, BE ADDED TO THE CONTRACT AT ANY TIME WITHIN 200 CALENDAR DAYS AFTER AWARD OF BASE PROPOSAL.” THIS RESULTS IN ADDED COSTS FOR EACH OPTIONAL BID ITEM. SINCE IT IS UNKNOWN WHEN, WHICH OR HOW MANY OPTIONS WILL BE AWARDED, EACH OPTION WILL BE PRICED TO INCLUDE THE COSTS ASSOCIATED WITH THE EXTENDED PROJECT DURATION FOR THAT ITEM SUCH AS CAMP SERVICES, SUPERVISORY AND ADMINISTRATIVE STAFF COST. IF MULTIPLE OPTIONS ARE AWARDED, WITH OVERLAPPING DURATIONS, THEN THESE COSTS WOULD BE CHARGED MULTIPLE TIMES, CAUSING UNNECESSARY PROJECTS COSTS TO THE GOVERNMENT. IF THE TIME PERIOD FOR AWARD OF THE OPTIONS COULD BE CHANGED TO WITHIN 30 CALENDAR DAYS AFTER AWARD OF BASE PROPOSAL THIS WOULD ALLEVIATE ANY UNNECESSARY COSTS TO THE GOVERNMENT. PLEASE CONSIDER REDUCING THE DURATION FROM BASE PROPOSAL AWARD TO 30 CALENDAR DAYS.

A.40 – Response is under development for distribution in subsequent amendment.

Q.41 WHICH BID ITEM IN THE PROPOSAL SCHEDULE SHOULD INCLUDE THE COMMUNICATIONS NETWORK COSTS?

A.41 Communications should be included in  
CLIN 0005AD Prime Power/Electrical/Communications

Q.42 ARE THERE ANY US MILITARY OR ISAF COMPOUNDS IN THE JALALABAD AREA AND WHAT IS APPROXIMATE DISTANCE TO PROPOSED SITE LOCATION?

A.42 – Response is under development for distribution in subsequent amendment.

Q.43 IT APPEARS THERE ARE LOCAL PEOPLE LIVING ON THE PROPOSED ANA SITE. WILL THE SITE BE CLEAR OF INHABITANTS PRIOR TO THE CONTRACT NTP?

A.43 – Response is under development for distribution in subsequent amendment.

Q.44 REFERENCE SPECIFICATION SECTION 01015 TECHNICAL REQUIREMENTS PARAGRAPH 9.4.1. “THE CONSTRUCTION SHALL MEET A MINIMUM OF 4MW (4000KW) CAPACITY, BUT SHALL BE DESIGNED TO MEET THE TOTAL SITE DEMAND LOAD PLUS 20% SPARE CAPACITY.” PLEASE CLARIFY IF THE REQUIREMENTS ARE TO CONSTRUCT A 4MW PLANT OR CONSTRUCT PLANT FOR TOTAL SITE DEMAND LOAD PLUS 20% SPARE CAPACITY (WITH A MINIMUM SIZE OF 4MW).

A.44 Construct plant for total site demand load plus 20% spare capacity (with a minimum size of 4MW).

Q.45 REFERENCE PROPOSAL SCHEDULE. ITEM NUMBER 0005AF AND 0007AP ROAD NETWORK APPEAR TO BE DUPLICATE ITEMS. PLEASE CLARIFY.

A.45 Item 0005AF has been deleted.

Road Network 0007AP Includes the following There is a Base Road System inside the fenced compound, A road to the ASP 1500 meters from the compound, A Road to the Burn Pit and a Road to the Ranges (Note: The Road to the ASP, Road to the Burn Pit and Road to the Ranges can be the same Road).

Road from Bridge to Brigade Main Gate 0007BB Includes the following In the Addendum there is a Road from the Base out to the Main Road across the Dam (approximately 4.6 Km long).

Q.46 REFERENCE SPECIFICATION SECTION 01010 SCOPE OF WORK, PARAGRAPH 2.5 FORCE PROTECTION INCLUDES CONSTRUCTION OF A RECEPTION CENTER. ADDITIONALLY, PARAGRAPH



2.25 RECEPTION CENTER INCLUDES CONSTRUCTION OF A RECEPTION CENTER. PLEASE CLARIFY IF ONE OR TWO RECEPTION CENTERS ARE INCLUDED IN THE SCOPE OF WORK.

A.46 There is one Reception Center at the Main Gate.

Q.47 REFERENCE TO RFP DOCUMENT, PAGE 143 OF 343, SECTION 01060 SPECIAL CLAUSES - PARAGRAPH 1.22.4 UNDER "TRANSPORTATION":

"WHAT ARE THE SPECIFICATIONS FOR NATO LEVEL BALLISTIC B6, ROOFB4, & FLOOR B8?"

A.47 See new Admendment for additional vehicle requirements.

Q.48 PLEASE CONFIRM CORRECTED COORDINATES OF JALALABAD ANA BRIGADE FACILITY LOCATION.

A.48 – Response is under development for distribution in subsequent amendment.

Q.49 SECTION 01010, SOW, PARAGRAPH 1.1.1 STATES "PERIMETER SECURITY SHALL PREVENT UNAUTHORIZED SITE ACCESS AND PROVIDE SAFETY PROTECTION TO THE CONTRACTOR'S WORK FORCE AND GOVERNMENT PERSONNEL FOR THE DURATION OF THE PROJECT."  
WHAT IS DOD REGULATION 2000.12 CAN YOU EXPLAIN WHAT SPECIFICATIONS SAFETY TO THE ... GOVERNMENT PERSONNEL FOR THE DURATION OF THE PROJECT," MEANS?

A.49 – Response is under development for distribution in subsequent amendment.

Q.50 THERE IS NO WAR RISK CLAUSE IN THIS CONTRACT?

A.50 The following is included in Section 00800 of the solicitation:

- **Attacks from Hostile Entities.** This contract is firm fixed-price. Costs incurred in the performance of project execution that arise from the attacks of hostile entities, such as costs arising from damage to or destruction of contractor equipment and facilities, and damage to or destruction of the project prior to Government acceptance, are the sole responsibility of the contractor. The Government makes no guarantee to provide the contractor with security, and bears no obligation to reimburse the contractor for costs arising from the attacks of hostile entities. When appropriate, the Contracting Officer may provide the contractor with an equitable adjustment with respect to time in accordance with clause 52.249-10; see 52.249-10(b)(1)(i) and (2).

Q.51 WILL THE GOVERNMENT PROVIDE FREE AND CLEAR TITLE FOR THIS PROJECT PRIOR TO NTP?

A.51 – Response is under development for distribution in subsequent amendment.

Q.52 ROAD NETWORK. TO WHICH ROAD DOES THE BASE ACCESS ROAD TO THE MAIN GATE NEED TO CONNECT TO?

A.52

Road Network 0007AP Includes the following There is a Base Road System inside the fenced compound, A road to the ASP 1500 meters from the compound, A Road to the Burn Pit and a Road to the Ranges (Note: The Road to the ASP, Road to the Burn Pit and Road to the Ranges can be the same Road).

Base Access Road from Bridge to Brigade Main Gate 0007BB Includes the following In the Addendum there is a Road from the Base out to the Main Road across the Dam (approximately 4.6 Km long).

Q.53 ARE THERE ANY INHABITANTS AND BUILDINGS AT THE PROJECT SITE.

A.53 There are no inhabitants on the site but there are a few ruins that will have to be demolished.


Q.54 PER RFP SECTION 01010 PARAGRAPH 1.1.2 IT IS STATED THAT “ALTITUDE: THE SITE HAS ROLLING HILLS. THE ELEVATION VARIES FROM APPROXIMATELY 621 (METERS) TO 650 (METERS). SEE APPENDICES FOR AERIAL OF SITE.

A.54 The information came from several GPS position shots. All survey data will have to be gathered by the successful Contractor, then produce a correct Topographical Map of the sit for final Master Plan to meet RFP requirements.

Q.55 CAN REINFORCED CONCRETE BE USED IN LIEU OF REINFORCED CMU?

A.55 Yes Reinforced Concrete may be susbituted for CMU as long as it meets all the requirements of the RFP.

(End of Summary of Changes)

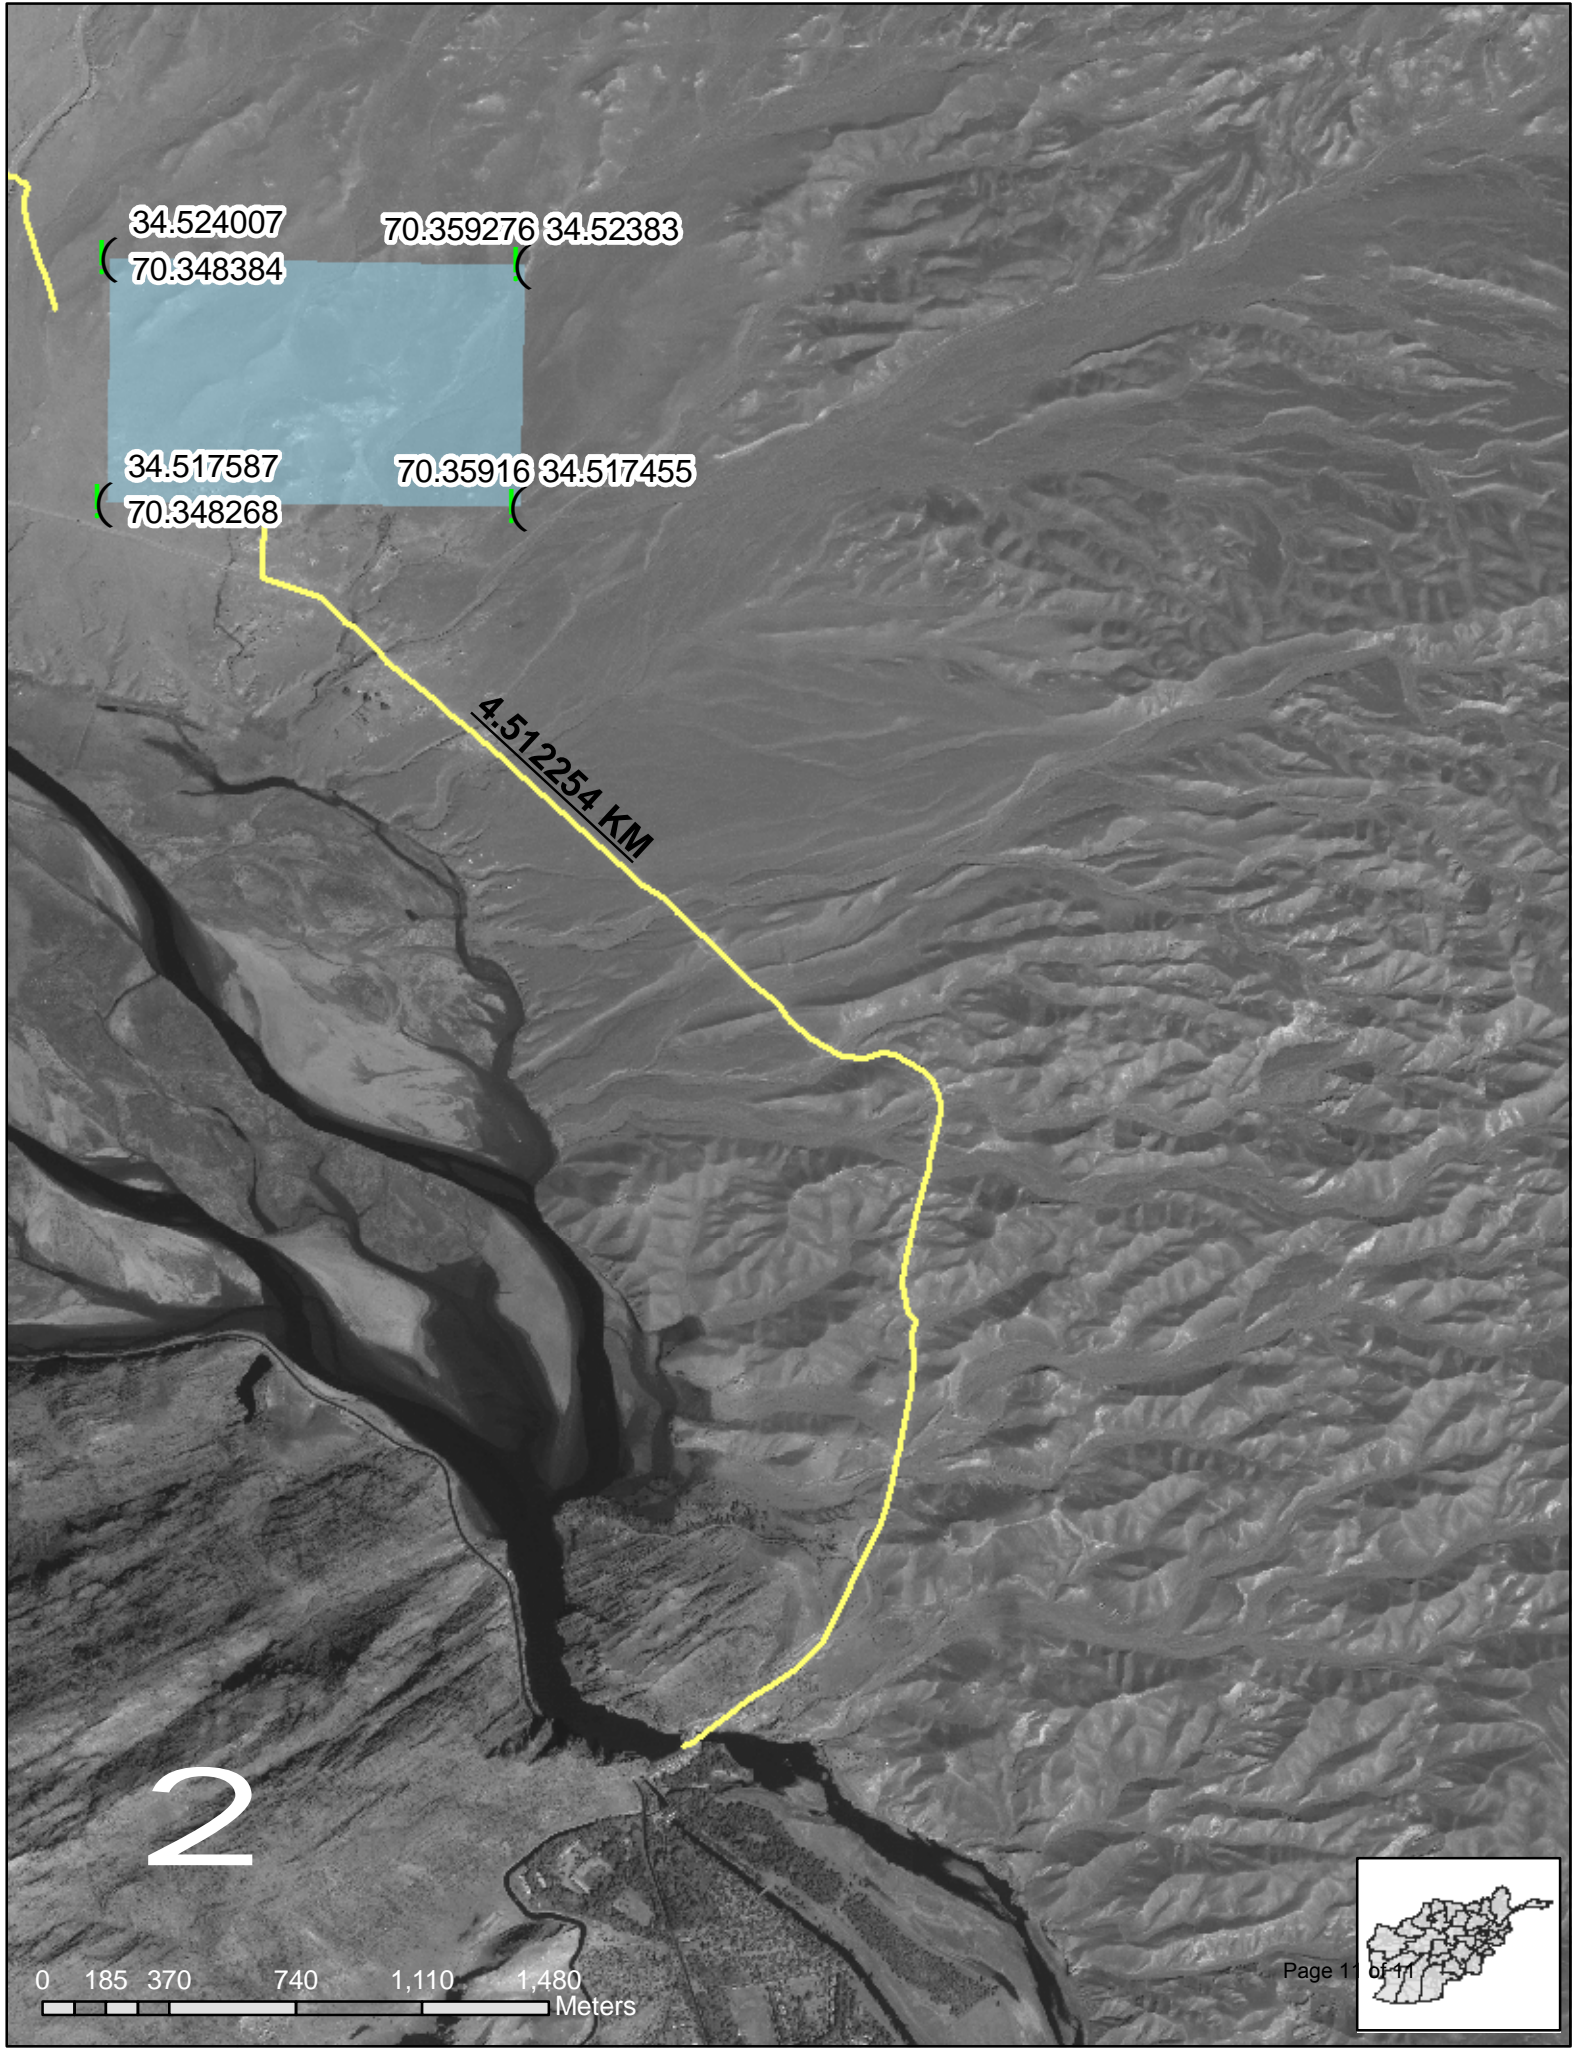

34.524007 70.359276 34.52383  
( 70.348384 )  
34.517587 70.35916 34.517455  
( 70.348268 )

4.512254 KM

2

0 185 370 740 1,110 1,480 Meters

